





Model 344

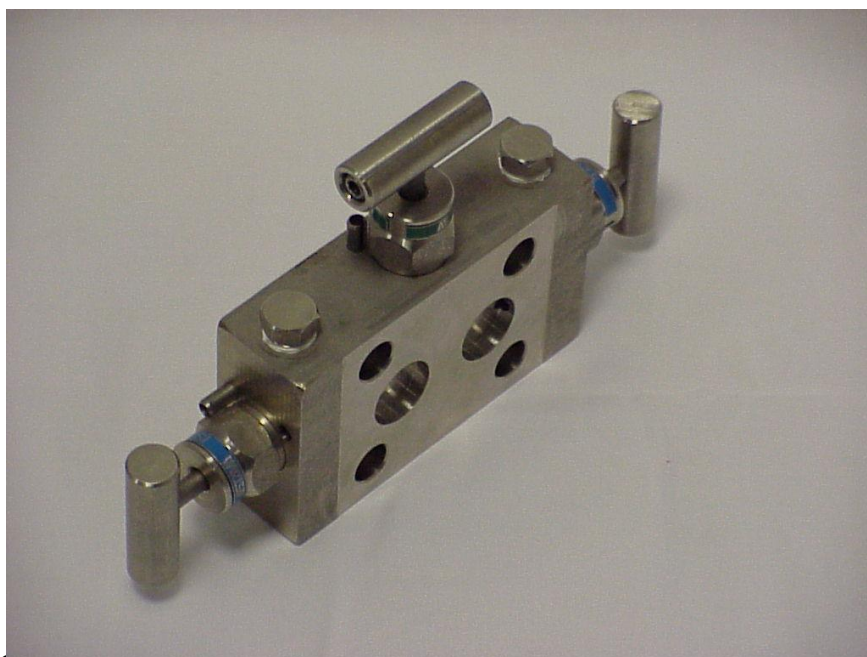


344-06

**3-VALVE MANIFOLD FOR DIRECT MOUNTING ON ROSEMOUNT 3051
DIFFERENTIAL PRESSURE TRANSMITTER WITHOUT CO-PLANAR FLANGE**

Standard materials			
Body, Bonnet		AISI 316 L	
Needle point		Rotating ceramic ball Al ₂ O ₃	
Stem		AISI 316 Ti with chromium-carbide diffusion coating	
Connections			
Process		2 x 1/2-14 NPT (F)	ANSI / ASME B1.20.1
Instrument		Flanged	
Test		2 x 1/4-18 NPT (F)	ANSI / ASME B1.20.1
Instrument mounting material			
4 Bolts 7/16" UNF		AISI 316	
Stem packing	PTFE	GRAFOIL nuclear quality	VITON O-ring
Model	344-01	344-05	344-06
Operating pressure / temperature rating	413 barg 38°C 6000 psig 100°F 200 barg 230°C 3000 psig 450°F	413 barg 38°C 6000 psig 100°F 200 barg 400°C 3000 psig 750°F	413 barg 38°C 6000 psig 100°F 200 barg 200°C 3000 psig 400°F
Remark(s)			
Rosemount mounting bracket can be mounted on this manifold.			
Optional			
Oxygen cleaned			344-xx/C
Extra's			Model
Mounting bracket			904, 906 or 906/P

Model 344

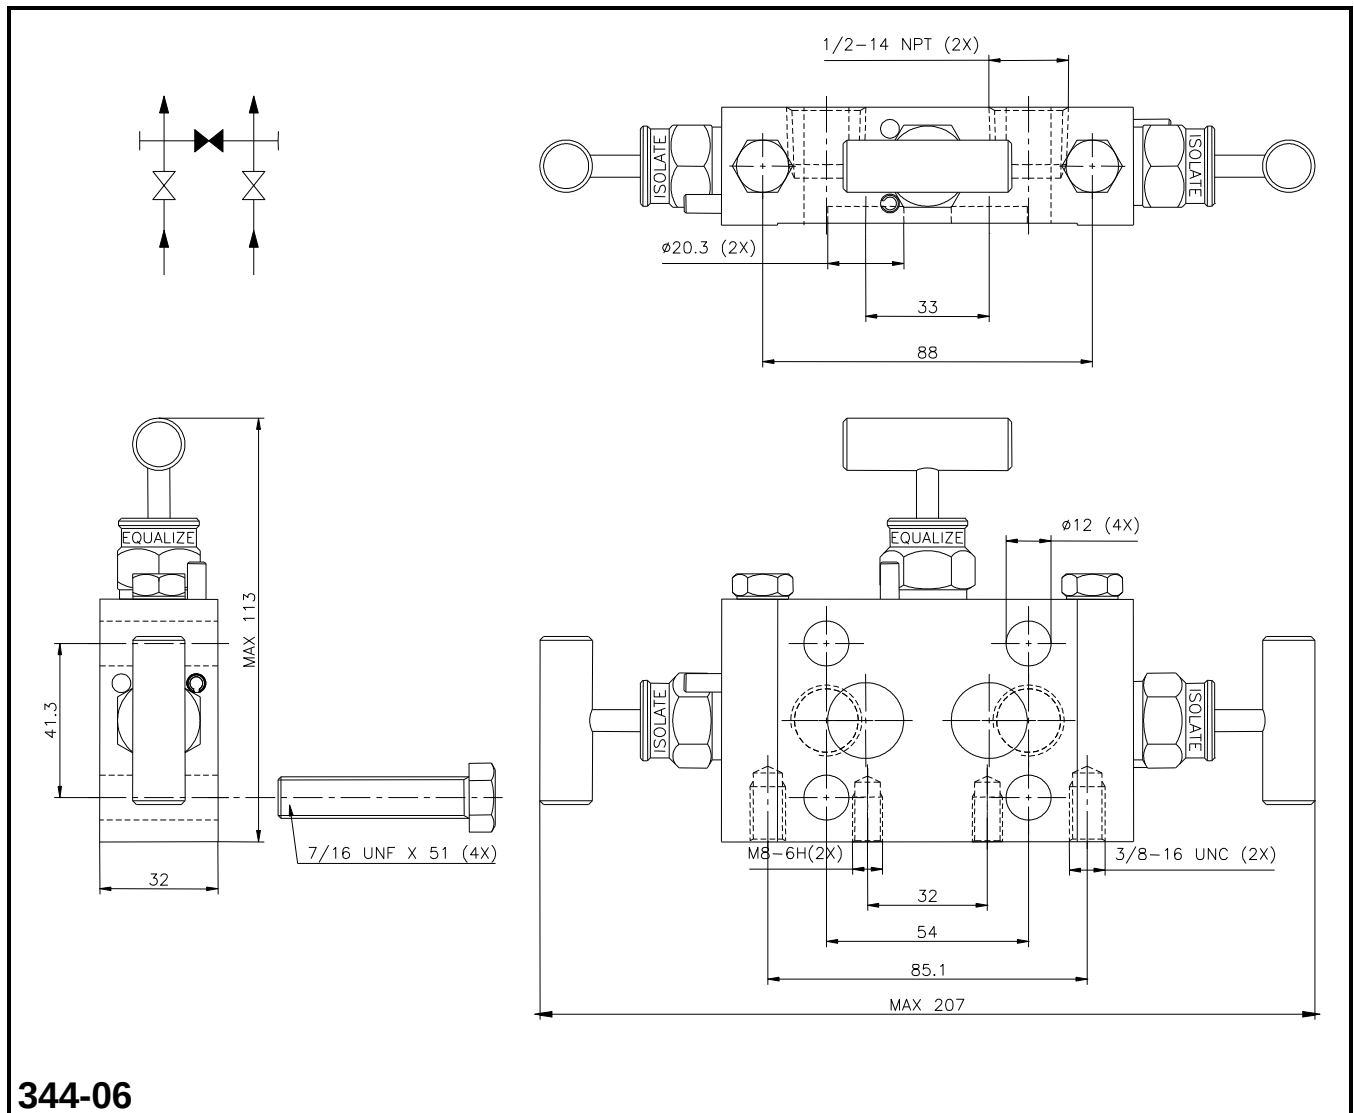

344-06

