





Model 529

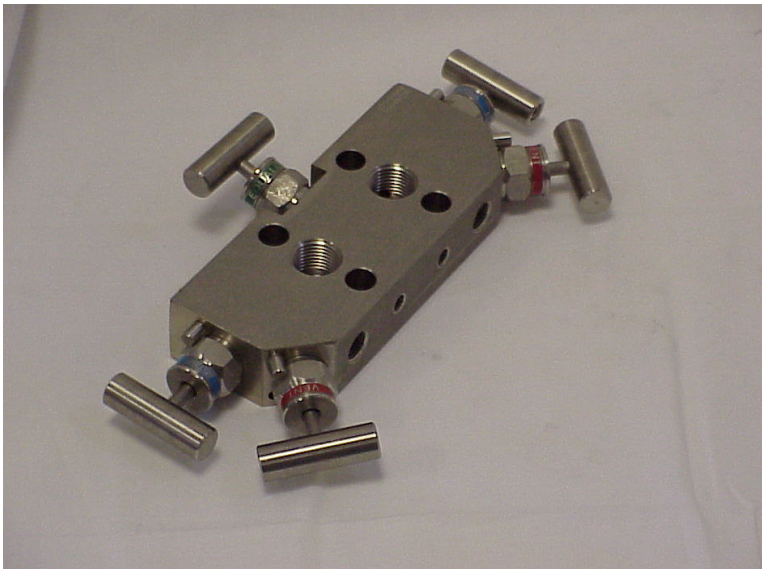


Picture model: 529-065


5-VALVE MANIFOLD FOR DIRECT MOUNTING ON DIFFERENTIAL PRESSURE TRANSMITTER HAVING 54 MM CENTRES

Standard materials				
Body, Bonnet	AISI 316 L			
Needle point	Rotating ceramic ball Al ₂ O ₃			
Stem	AISI 316 Ti with chromium-carbide diffusion coating			
Connections				
Process	2 x 1/2-14 NPT (F)	ANSI / ASME B1.20.1		
Instrument	Flanged	DIN 19213		
Vent / Purge	2 x 1/4-18 NPT (F)	ANSI / ASME B1.20.1		
Instrument mounting material				
2 Gaskets	PTFE			
4 Bolts 7/16" UNF	AISI 316			
Stem packing	Code	P/T	Material	
Teflon (PTFE)	xxx-01	413 barg 38 °C 200 barg 230 °C 6000 psig 100 °F 3000 psig 450 °F	AISI 316 (L)	
VITON	xxx-06	600 barg 38 °C 200 barg 200 °C 9000 psig 100 °F 3000 psig 400 °F	AISI 316 (L)	
Grafoil	xxx-05	413 barg 38 °C 200 barg 400 °C 6000 psig 100 °F 3000 psig 750 °F	AISI 316 (L)	
Other packingmat.	Sillicon, Kalrez, Supagraf Premier, EPDM, Elast-o-lion			
Special alloys	Alloy 400	Alloy C-276	TITAN	DUPLEX 1.4462
Model	xxx-02	xxx-03	xxx-04	xxx-20
Stem packing	PTFE	PTFE	PTFE	VITON O-ring
	Alloy 825	Alloy 625	Alloy 254Smo (6M0)	
Model	xxx-12 (825)	xxx-12	xxx-11	Other on request
Stem packing	PTFE	PTFE	PTFE	
Optional				
Vent ½"NPT F (standard is ¼"Npt F)				xxx/V12-xx
Stem material Monel K500 (NACE MR-01-75 compliant)				xxx-xx5
Oxygen cleaned				xxx-xx/C
Mounting bracket				904, 906 or 906/P
G-threaded connections				xxx/B -xx
All connections G-threaded ¼				xxx/B14-xx
10.000 psi solution				xxx/10K-xx


Model 529

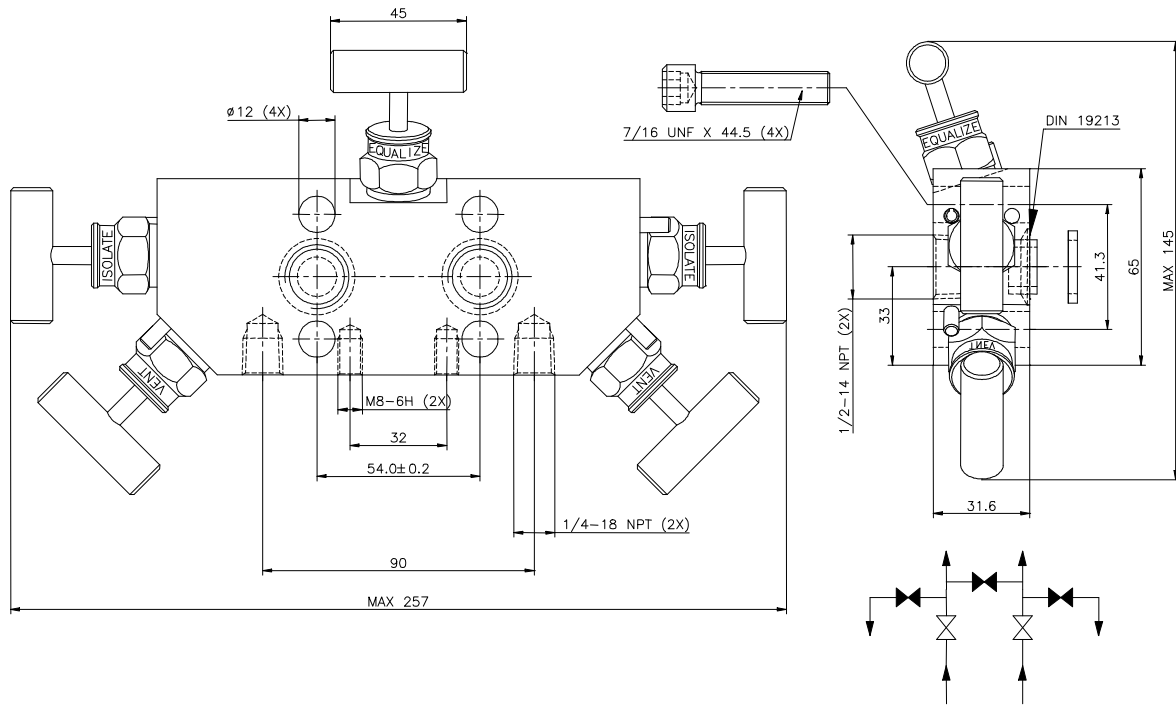


529-06



PTFE
-01 -02
-03 -04



GRAFOIL
-05



VITON O-ring
-06
-10