



H+
VALVES

H+ VALVES
557 IMPASSE
"LES SAILLANTS"
F-69380
CHESSY-LES-MINES
Tél: 04.78.43.91.52
Email: gen@hvalves.com
Web: www.hvalves.com

SOUPAPE DE SURETE BIOTECH
SAFETY RELIEF VALVE BIOTECH
TYPE B 2
do - 10 / ... / 50 - CLAMP DIN 11866 C - ASME BPE

BIOB2C

Rep	Nb	DESIGNATION / DESCRIPTION	MATIERE / MATERIAL
01	1	CORPS / BODY	1.4435 / X2CrNiMo18-14-3 (BN2)
06	1	PASTILLE CLAPET / SOFT DISC	EPDM
08	1	CLAPET / DISC	1.4435 / X2CrNiMo18-14-3 (BN2)
10	1	MEMBRANE / MEMBRANE	PTFE VIERGE / VIRGIN PTFE
12	1	TIGE / STEM	1.4435 / X2CrNiMo18-14-3 (BN2)
16	1	COUPELLE INFERIEURE / UNDER SPRING PLATE	1.4435 / X2CrNiMo18-14-3 (BN2)
17	1	RESSORT / SPRING	1.4310 / X10CrNi18-8 (AISI 302)
19	1	FUT / BONNET	1.4435 / X2CrNiMo18-14-3 (BN2)
20	1	VIS DE CLAPET / DISC SCREW	Inox / Stainless Steel
22	1	VIS DE REGLAGE / ADJUSTEMENT SCREW	1.4435 / X2CrNiMo18-14-3 (BN2)
23	1	C-ECROU VIS DE REGLAGE / LOCK NUT	1.4435 / X2CrNiMo18-14-3 (BN2)
24	1	VIS SANS TETE C-ECROU / SCREW	Inox / Stainless Steel
27	1	BOUCHON / PLUG	1.4435 / X2CrNiMo18-14-3 (BN2)
30	1	RONDELLE / RING	Inox / Stainless Steel
34	1	CIRCLIPS SUPERIEUR / UPPER ELASTIC PLATE	Inox / Stainless Steel
35	1	CIRCLIPS INFERIEUR / UNDER ELASTIC PLATE	Inox / Stainless Steel
65	1	CAPSULE / CAPSULE	PTFE VIERGE / VIRGIN PTFE

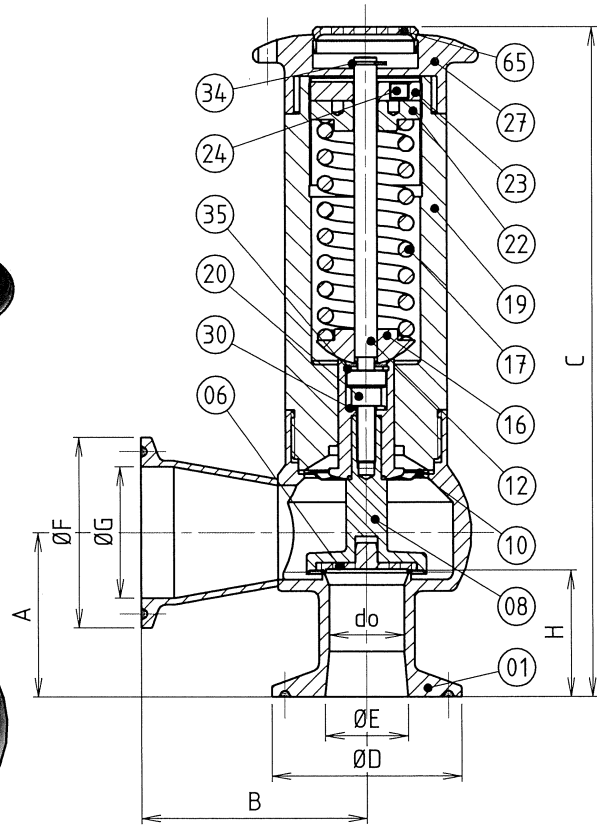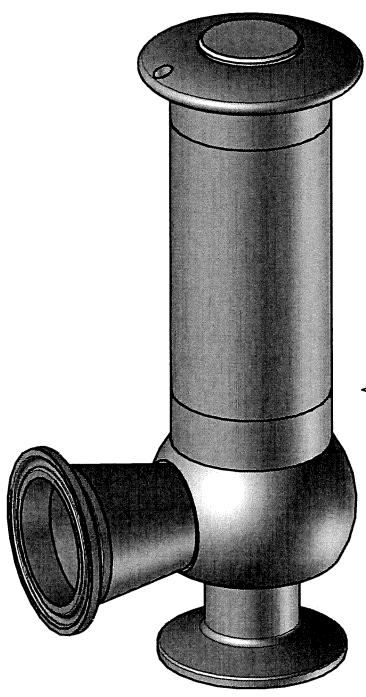

- RACCORDEMENTS ENTREE/SORTIE: RACCORD TRI-CLAMP ASEPTIQUE DIN 11866 SERIE C SELON ASME BPE 2009
- Ra INTERIEUR ≤ 0,38 / Ra EXTERIEUR ≤ 0,8 POLISSAGE MECANIQUE
- BOUCHON RELEVABLE
- MATERIEL CONFORME AUX DIRECTIVES: DESP 2014/68/UE & ATEX 2014/34/UE
- HOMOLOGATIONS PIECES REP.06/10/65: FDA 1935/2004 USP CLASS VI 121°C
- CONNECTIONS INLET/OUTLET: CLAMP DIN 11866 SERIE C (IMPERIAL) ACCORDING TO ASME BPE 2009
- INTERNAL Ra ≤ 0,38 / EXTERNAL Ra ≤ 0,8 MECHANICAL POLISHING
- LIFTABLE PLUG
- MATERIAL CONFORM TO DIRECTIVES: PED 2014/68/EU & ATEX 2014/34/UE
- HOMOLOGATIONS PARTS REP.06/10/65: FDA 1935/2004 USP CLASS VI 121°C

CE DOCUMENT PEUT ETRE MODIFIE SANS AVIS PREALABLE
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

do (mm)	RACCORDEMENT DIN 11866 C - ASME BPE / CONNECTION DIN 11866 C - ASME BPE						A (mm)	B (mm)	C (mm)	H (mm)	P.d.o. / SET PRESSURE (barg)		SECTION DE PASSAGE / CROSS SECTION (mm²)	MASSE / WEIGHT (Kg)
	ENTREE/ INLET	ØD (mm)	ØE (mm)	SORTIE/ OUTLET	ØF (mm)	ØG (mm)					mini	MAXI		
10	3/4" C	Ø25.2	Ø15.75	3/4" C	Ø25.2	Ø15.75	32.5	39.5	122	26	1	10	78	0.40
15	3/4" C	Ø25.2	Ø15.75	1" C	Ø50.5	Ø22.10	34.5	45	138	27	1	10	177	0.47
20	1" C	Ø50.5	Ø22.10	1.1/2" C	Ø50.5	Ø34.80	43.5	60	178	34	1	10	314	1.00
25	1.1/2" C	Ø50.5	Ø34.80	1.1/2" C	Ø50.5	Ø34.80	43.5	60	185	31	1	10	490	1.39
50	2.1/2" C	Ø77.5	Ø60.20	3" C	Ø91	Ø72.90	80	120	344	52	1	10	1963	12.89