

PRESSURE REDUCING VALVE Clean Steam P-160A (Air loaded)

DESCRIPTION

The ADCA P-160A series **direct acting, air loaded diaphragm sensing**, pressure reducing valves are designed for use on clean steam, compressed air, water and other gases or liquids compatible with the materials of construction .

MAIN FEATURES

Compact design.
Completely machined from barstock material, no castings or forgings are used on the standard version.
Set point can be adjusted remotely using a relieving gas pressure regulator or through a I-P convertor.
Ease operation during the sterilization or cleaning process (SIP-CIP), by remotely increasing the set point, ensures that the valve stays totally open during the process.

STANDARD SURFACE FINISH

Internal wetted parts: 0,5 microns Ra

External :

Body and cover– Fine machined
(mechanical or electro polished as option)

OPTIONS: Aluminium cover.

USE: Clean steam, compressed air, water and other gases and liquids compatible with the construction.

AVAILABLE MODELS: P-160A


SIZES: DN3/4", 1", 1 1/2", 2" ; DN 20, 25, 40, 50

OUTLET RANGES: 1,5 – 6 bar. The loading pressure must be slightly above the outlet pressure (+/- 0,2 bar), to overcome the diaphragm return spring.

CONNECTIONS: Clamp ends or others on request

INSTALLATION: Horizontal installation. Inlet vertical and horizontal outlet angle connection.

ORDER REQUIREMENTS: Type of fluid
Maximum operating temperature
Inlet pressure and required outlet pressure
Capacity (maximum and minimum).

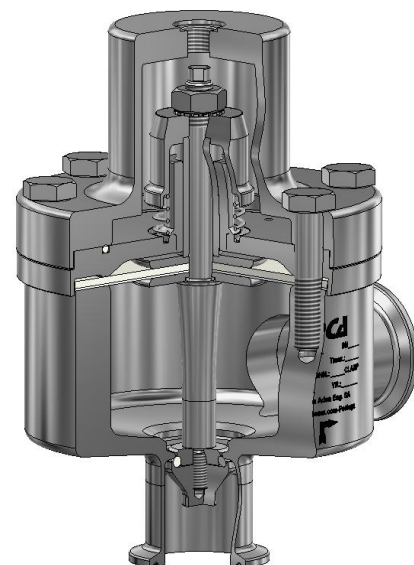

LIMITING CONDITIONS	
Valve model	P-160A
Body design conditions	PN 16
Max.upstream pressure	8 bar
Max.downstream pressure	6 bar
Min.downstream pressure	1,5 bar
Max.design temperature *	150 °C

*Other on request.

CE MARKING (PED - European Directive 97/23/EC)	
PN 16	Category
DN 3/4" to 2"	SEP - art. 3, paragraph3

DIMENSIONS (Clamp conn.)

SIZE DN	A	B	C	D	WGT. Kgs
3/4"-20	85	55	120	130	6
1"-25	85	55	120	130	6
1 1/2"-40	85	65	130	130	6,5
2"-50	85	70	130	130	6,5

* Different lenghts on request.

Consult factory for certified dimensions

Dimensions subject to change without notice

CAPACITIES

Valve Size	3/4"-20	1"-25	1 1/2"-40	2"-50
KVs (m3/h)	1,3* - 3	3,5* - 4,5	5,3	8,5

*Max.available Kvs with ASME BPE clamp connection

Connection examples

Clamp	Round thread	Flange

MATERIALS

POS.	DESIGNATION	MATERIAL
1	Valve body	AISI316L / 1.4404
2	Cover	AISI316L / 1.4404
3	Centering plate	AISI316L / 1.4404
4	* Valve stem	AISI316L/1.4404
5	* Soft plug	EPDM; PTFE **
6	* Valve plug	AISI316L / 1.4404
7	* Upper diaphragm	EPDM;VITON**
8	* Lower diaphragm	PTFE
9	Diaphragm plate	AISI316L / 1.4404
10	* O-ring	EPDM
11	Diaphragm plate	AISI316L / 1.4404
12	Stem guide	AISI316 / 1.4401
13	Spring plate	AISI316 / 1.4401
14	Nut	St.Steel A2 - 70
15	Washer	AISI316 / 1.4401
16	Spring	AISI 302 / 1.4300
17	O-ring	EPDM
18	Bolts	St.Steel A2 - 70

* Available spare parts; **Others according to the fluid

FDA/USP Class VI seals certificate on request

Viton diaphragm only with FDA approval (Pos.7)

Remarks: All valves have a serial number. In case of non-standard valves this number must be supplied if spare parts are ordered.

